


A/A/



## Contents

1. Description	
1.1 General Description	
1.2 Features	
1.3 Application	
1.4 Package Dimension	
1.5 Product Parameters	
1.6 The C.I.E Chromaticity Diagram CIE	
1.7 Typical optical characteristics curves	
2. Packaging	
2.1 Packaging Specification	
2.1.1 Carrier Tape Dimension	14
2.1.2 Reel Dimension	14
2.1.3 Label Form Specification	15
2.2 Moisture Resistant Packing	
2.3 Cardboard Box	
2.4 Reliability Test Items And Conditions	
2.5 Criteria For Judging Damage	
3. SMT Reflow Soldering Instructions SMT	
3.1 SMT Reflow Soldering Instructions SMT	
4. Handling Precautions	
4.1 Handling Precautions	

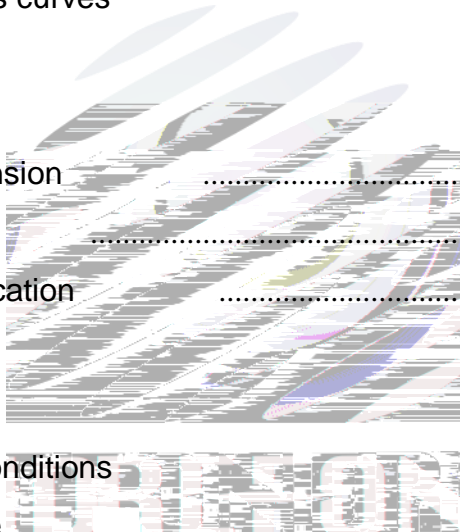

# 1. Description

## 1.1



The White LED which was fabricated using a blue chip and the phosphor

LED

3.0mmX3.0mmX0.55mm

## 1.2 Features

EMC Package. EMC.

Extremely wide viewing angle.


Suitable for all SMT assembly and solder process.

Package: 5000pcs/reel.

Moisture sensitivity level: Level 3.

RoHS compliant.

RoHS

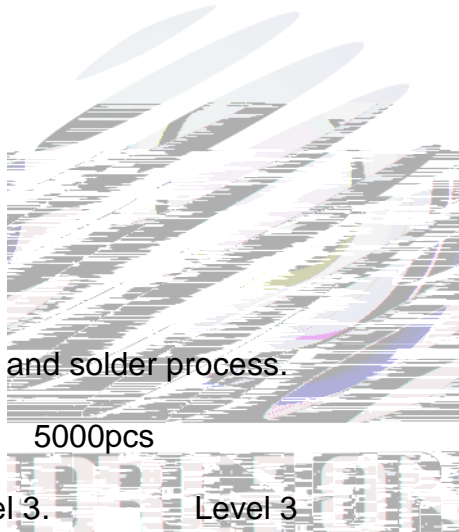

SMT

5000pcs

Level 3

## 1.3 Application

Optical indicator.

Indoor display. 具

Outdoor lighting

General use.



## 1.5 Product Parameters

Table 1-1 Electrical / Optical Characteristics at Ts=25°C —

Product	Symbol	test condition	Value			unit
			Min.	Max.	Typ.	
Rank R2 Forward Voltage	Vf	If =150mA	6.0	6.2	---	V



Table 1-2 Absolute Maximum Ratings at Ts=25°C

Parameter	Symbol	Rating	Units
Power Dissipation	$P_D$	1200	mW
Forward Current	$I_F$	18	mA
Peak Forward Current	$I_{FP}$	240	mA
Reverse Voltage	$V_R$	10	V
Electrostatic Discharge(HBM)	$E_{SD}$	2000	V
Operating Temperature 低	$T_{OPR}$	-40 ~ +100	

Notes

- 1/10 Duty cycle, 0.1ms pulse width. 0.1ms, 1/10.
- The above forward voltage measurement allowance tolerance is  $\pm 0.1V$ . "
- The above color coordinates measurement allowance tolerance is  $\pm 0.003$   $\pm 0.003$ .
- The above luminous intensity measurement allowance tolerance  $\pm 10\%$ . "
- Care is to be taken that power dissipation does not exceed the absolute maximum rating of the product.
- All measurements were made under the standardized environment of Refond.
- When the LEDs are in operation the maximum current should be decided after measuring the package temperature, junction temperature should not exceed the maximum rate. LED

### 1.6 The C.I.E Chromaticity Diagram CIE

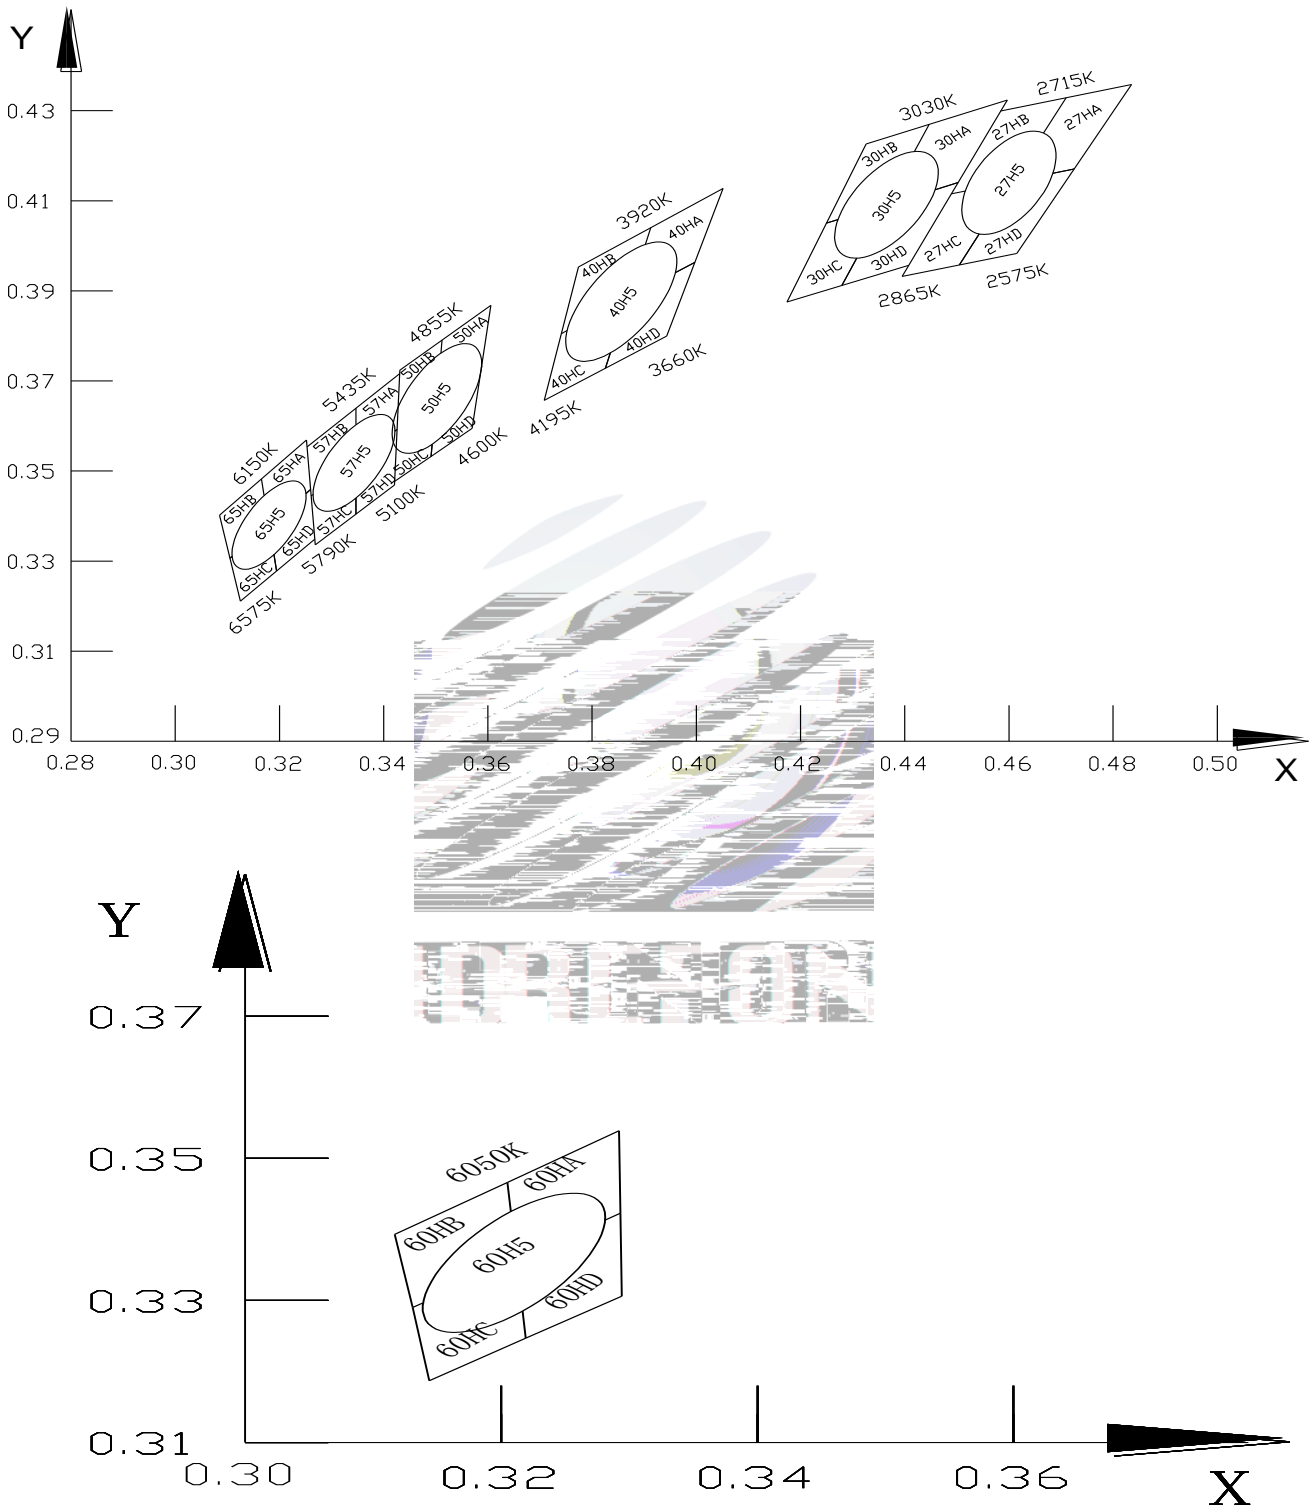


Fig 1-6 The C.I.E Chromaticity Diagram CIE

## Bin data

### ANSI 5-Step

Bin Code	X	Y	a	b	
27H5	0.4600	0.4140	0.01350	0.00700	53°42
30H5	0.4365	0.4091	0.01390	0.00680	53°13
40H5	0.3856	0.3876	0.01565	0.00670	53°43
50H5	0.3502	0.3661	0.01370	0.00590	59°37
57H5	0.3343	0.3518	0.01243	0.00533	59°09
60H5	0.3212	0.3356	0.0112	0.0048	64.58
65H5	0.3180	0.3380	0.01561	0.00665	58°34

### ANSI 7-Step

Bin Code	X1	Y1	X2	Y2	X3	Y3	X4	Y4	X5	Y5
27HA	0.4835	0.4358	0.4725	0.4171	0.4684	0.4161	0.4666	0.4250	0.4710	





60HD	0.3212	0.3356	0.3219	0.3242	0.3296	0.3302	0.3295	0.3419	/	/
65HA	0.3252	0.3569	0.3260	0.3459	0.3251	0.3450	0.3171	0.3445	0.3165	0.3482
65HB	0.3165	0.3482	0.3171	0.3445	0.3109	0.3311	0.3105	0.3307	0.3085	0.3402
65HC	0.3105	0.3307	0.3109	0.3311	0.3189	0.3315	0.3195	0.3278	0.3125	0.3211
65HD	0.3251	0.3450	0.3260	0.3459	0.3268	0.3349	0.3195	0.3278	0.3189	0.3315



## 1.7 Typical optical characteristics curves

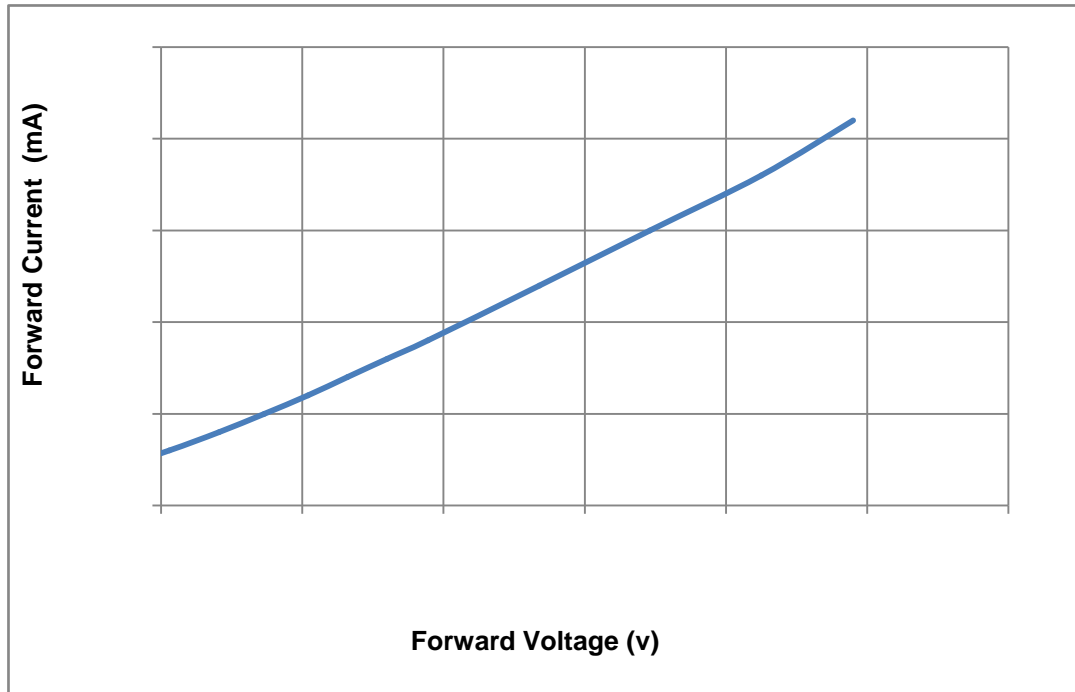


Fig 1-9 Forward Voltage Vs. Forward Current

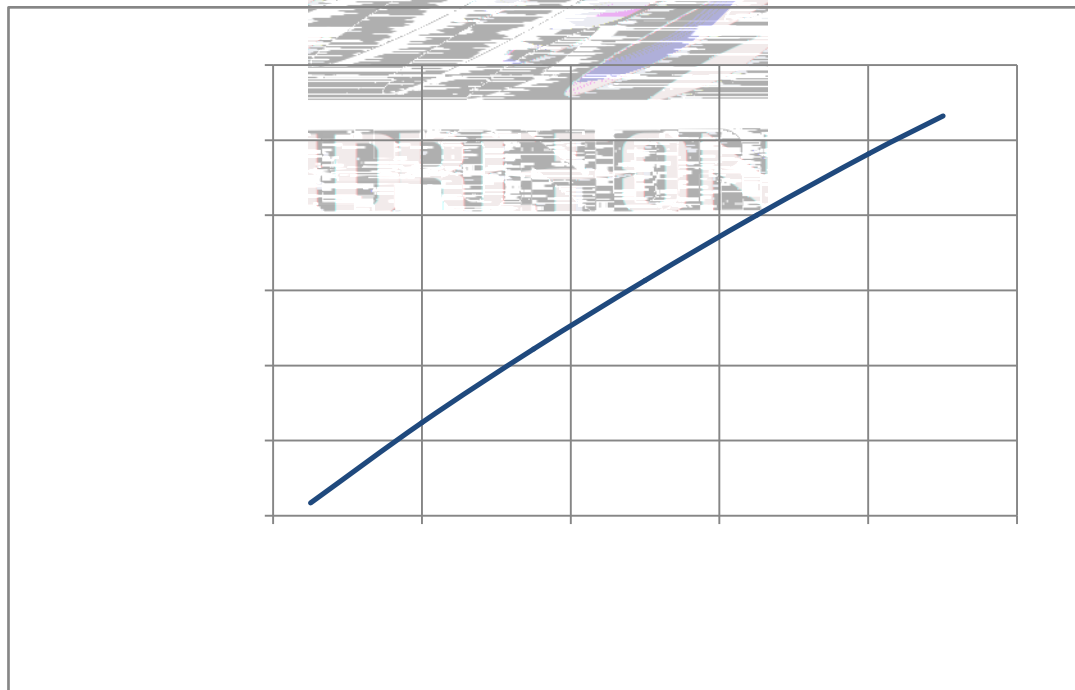


Fig 1-10 Forward Current Vs. Relative Intensity

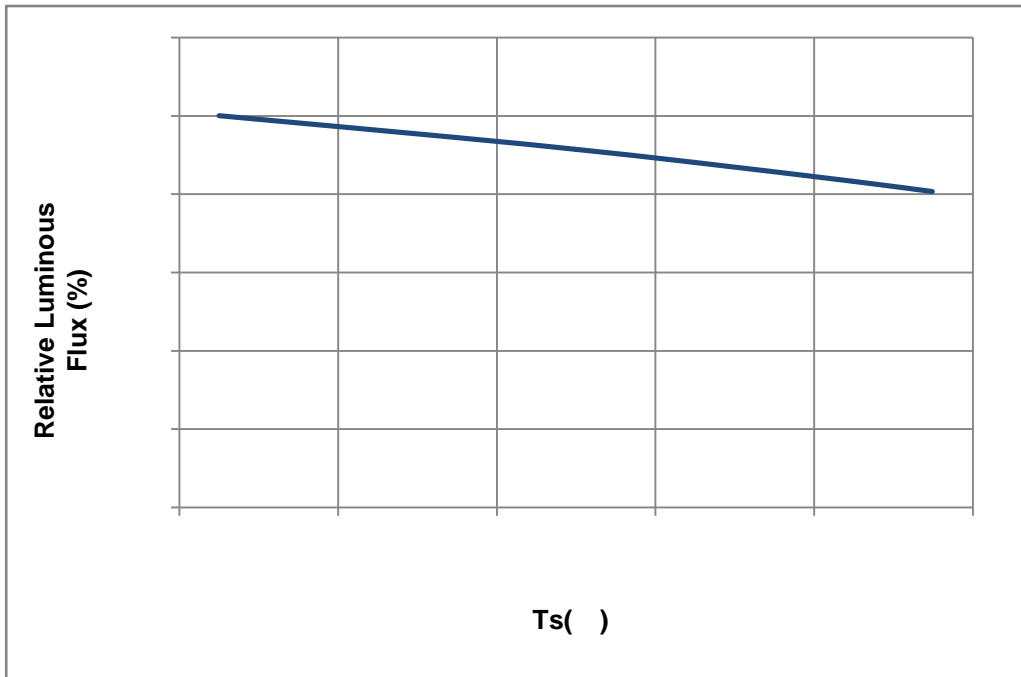


Fig 1-11 Solder Temperature Vs Relative Intensity

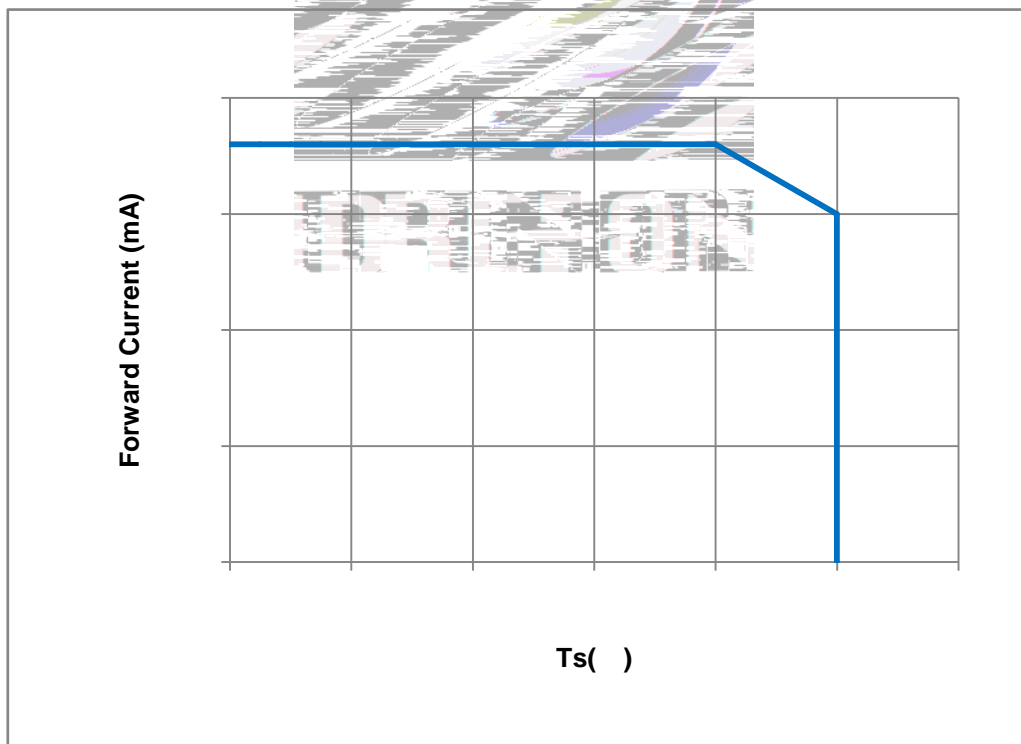


Fig 1-12 Solder Temperature Vs. Forward Current

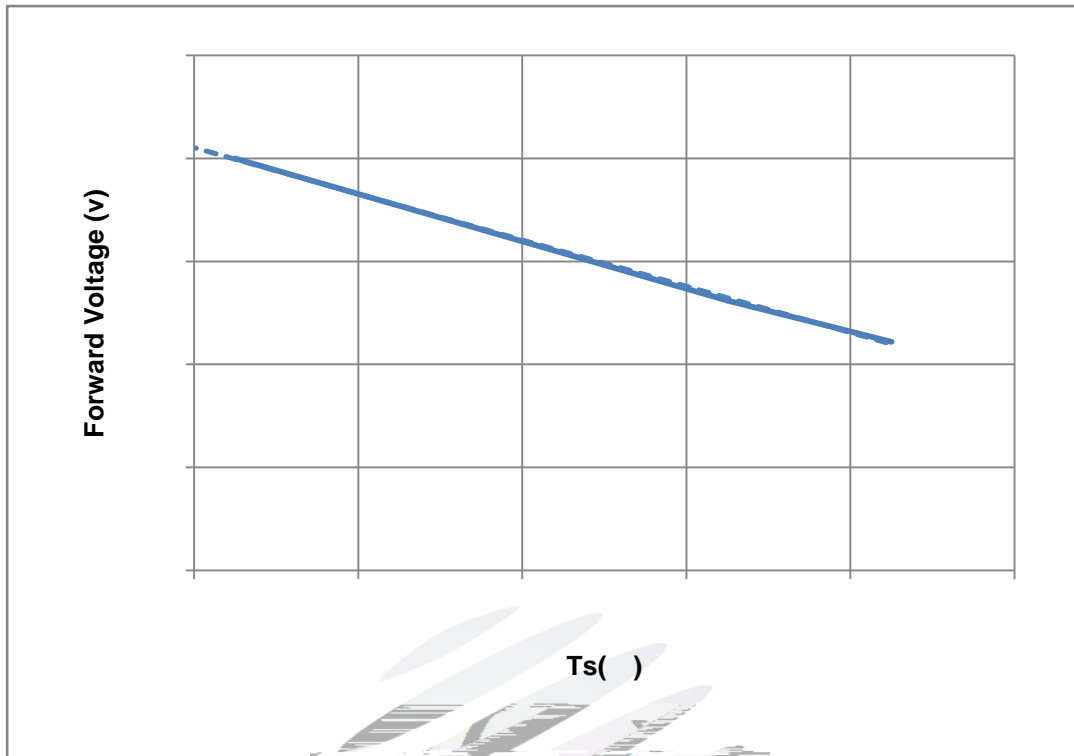


Fig 1-13 Forward Voltage Vs Solder Temperature


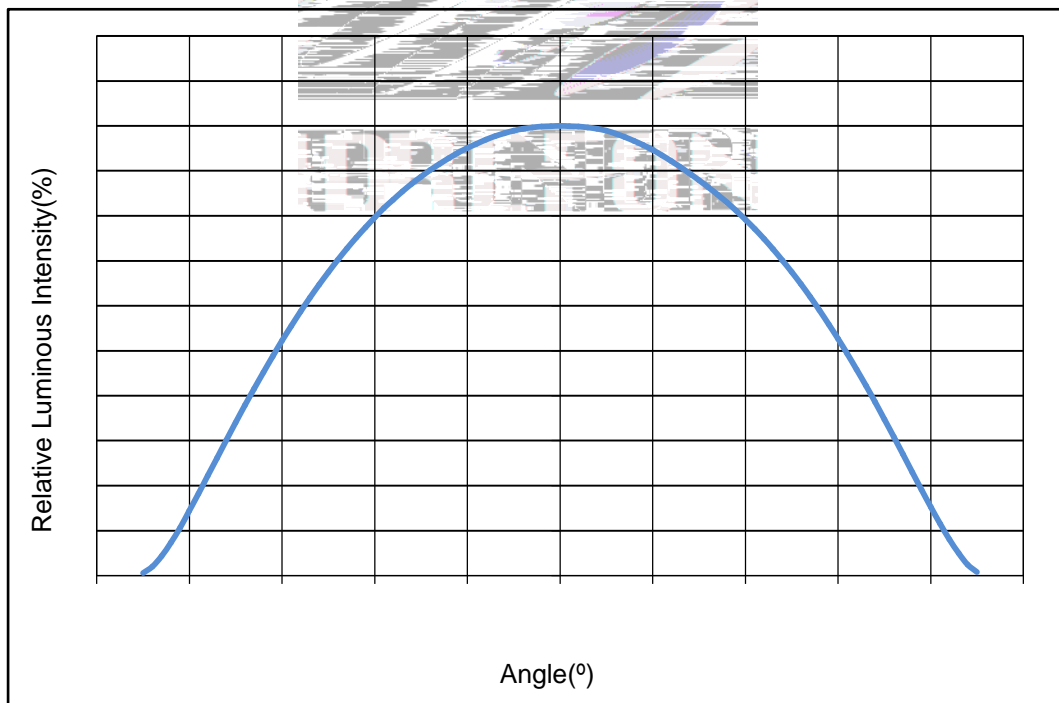


Fig 1-14 Radiation diagram



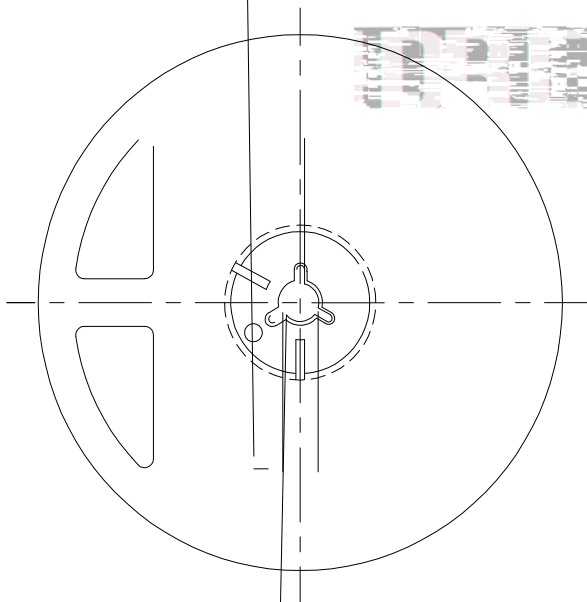

### 2.1.3 Label Form Specification

Table 2-2 Title

PART NO.	Part Number
SPEC NO.	Spec Number
LOT NO.	Lot Number
BIN CODE	Bin Code

Fig 2-3 Title

### 2.2 Moisture Resistant Packing



Fig.2-4Title

### 2.3 Cardboard Box

Fig.2-5Title

## 2.4 Reliability Test Items And Conditions

Table 2-3 Title

Test Items	Ref.Standard	Test Condition	Time	Quantity	Ac/Re /
Reflow	JESD22-B106	Temp:260 max T=10 sec	2times.	10Pcs.	0/1
Temperature Cycle	JESD22-A104	100 30 min. -40 30 min.	300Cycles	10Pcs.	0/1
Thermal Shock	JESD22-A106	-40 15min 10sec 100 15min	300Cycles	10Pcs.	0/1
High Temperature Storage	JESD22-A103	Temp.:105	1000Hrs.	10Pcs.	0/1
Low Temperature Storage	JESD22-A119	Temp.: -40	1000Hrs.	10Pcs.	0/1
Life Test	JESD22-A108	Ta=25 If =150mA	1000Hrs.	10Pcs.	0/1
High Temperature High Humidity Life Test	JESD22-A101	60 / 90%RH If=150mA	1000Hrs.	10Pcs.	0/1

## 2.5 Criteria For Judging Damage

Table 2-4 Title

Test Items	Symbol	Test Condition	Criteria For Judgement	Applicable project
Forward Voltage	Vf	If =150mA	10%	Reflow Temperature Cycle High and Low Temperature Storage Life Test
Luminous Flux		If =150mA	Maintenance 85%	Temperature Storage Life Test
High Temperature High Humidity Life Test	/	If =150mA	No open circuit, shortcircuit or flicke	High Temperature High Humidity Life Test



Notes

1.The Reliability tests are based on Refond existing test platform.

2. The technical information shown in the data sheets are limited to the typical characteristics and circuit examples of the referenced products. It does not constitute the warranting of industrial property nor the granting of any license. voltage distribution, heat dissipation and others.

低

LED

两

低



### 3. SMT Reflow Soldering Instructions SMT

#### 3.1 SMT Reflow Soldering Instructions SMT

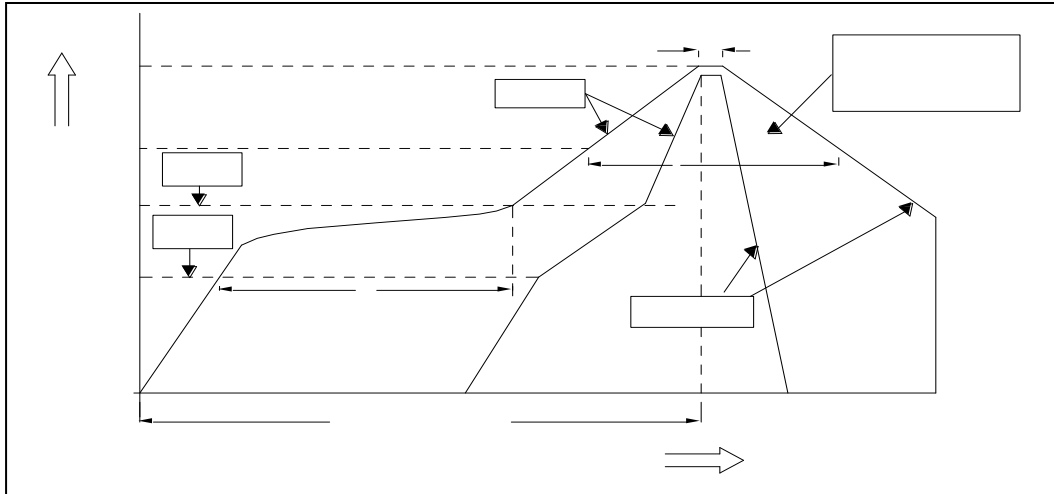


Fig.3-1Title

Table 3-1Title

Average temperature rise speed	$T_{smx}$ $T_p$	3 °C/ Max 3 °C/ s
Preheating: minimum temperature	( $T_{smin}$ )	150 °C
Preheating: Max temperature	( $T_{smx}$ )	200 °C
Preheating: Time	$T_{smin}$ $T_{smx}$	60 - 120 60s-120s
Time limited to maintain high temperature: the temperature	( $T_L$ )	217 °C
Time limited to maintain high temperature: The Time	( $t_L$ )	60 Max 60s
Peak /Classification of temperature:	/ ( $T_p$ )	260 °C
Time limit classification of peak temperature time	$t_p$	10 Max 10s
Hold time within 5 °C with the actual peak temperature ( $T_p$ )—	( $T_p$ )	30 Max 30s
Cooling speed		6 °C/ Max 6 °C/ s
Needed time from 25 °C to $T_p$ 25 °C		8 Max 8 minutes



(3) Do not apply mechanical force or excess vibration during the cooling process to normal temperature after soldering. Do not rapidly cool device after soldering.



## 4. Handling Precautions

### 4.1 Handling Precautions

(1) LED operating environment and sulfur element composition cannot be over 100PPM in the LED mating usage material. This is provided for informational purposes only and is not a warranty or endorsement. LED 低 — LED 100PPM.

低

(2) In order to prevent external material from getting into the inside of LED, which may cause the malfunction of LED, the single content of Bromine element is required to be less than 900PPM, the single content of Chlorine element is required to be less than 900PPM, the total content of Bromine element and Chlorine element in the external materials of the application products is required to be less than 1500PPM. This is provided for informational purposes only and is not a warranty or endorsement.

LED 具

LED

900PPM

900PPM

—

1500PPM.

低

(3) VOCs (Volatile organic compounds) emitted from materials used in the construction of fixtures can penetrate silicone encapsulants of LEDs and discolor when exposed to heat and photonic energy. The result can be a significant loss of light output from the fixture. Knowledge of the properties of the materials selected to be used in the construction of fixtures can help prevent these issues. Refond

(4) Handle the component along the side surface by using forceps or appropriate tools; do not directly touch or Handle the silicone lens surface, it may damage the internal circuitry.

具

Fig 4-1 Title

(5) In designing a circuit, the current through each LED can not exceed the absolute maximum rating specified for each LED.



冲

下 低

LED

Table 4-1 Storage

Conditions		Temperature	Humidity	Time
Storage	Before Opening Aluminum Bag	30	75%	Within 1 Year From Date 具
	After Opening Aluminum Bag	30	60%	24hours 24
Baking		60 ± 5		24hours 24

(8) If the moisture absorbent material ( silica gel ) has faded away or the LEDs have exceeded the storage time , baking treatment should be performed after unpacking and based on the following condition ( 65±5 ) °C for above 24 hours.

If the package is flatulence or damaged, please notify the sales staff to assist.

(9) Similar to most Solid state devices; LEDs are sensitive to Electro-Static Discharge (ESD) and Electrical Over Stress (EOS).

LED

(10) Other points for attention, please refer to our relevant information.

入

Version	Verifier	Remarks
---------	----------	---------







www.refond.com



Declare

This specification is written both in English and in Chinese and the latter is formal.